



Registration number: EPD 016:2024



PORTLAND LIMESTONE CEMENT CEM II/A-L 42.5R - OUTÃO

Issue date: 15/11/2024

Expiry date: 14/11/2029

SECIL - COMPANHIA GERAL DE CAL E CIMENTO, S.A.



Version 1.4.1 Ed. March 2024





Contents


1.	GENERAL INFORMATION	1
1.1.	The DAPHabitat system	1
1.2.	EPD Owner	1
1.3.	EPD information	2
1.4.	Verification statement	2
1.5.	Registration of the EPD	2
1.6.	PCR (product category rules) basic model	3
1.7.	c-PCR (complementary product category rules)	3
1.8.	Product information/product class	4
1.9.	Calculation rules of the LCA	5
1.10.	Use of average environmental performance	6
1.11.	Technical information for Reference Service Life (RSL)	6
1.12.	Diagram of the process input and output flows.....	6
2.	CORE ENVIRONMENTAL IMPACT INDICATORS	7
2.1.	Description of the system boundaries.....	7
2.1.1.	Justification for exemption to declare modules of C1, C2, C3, C4 and D	8
2.2.	Basic environmental impact indicators	9
2.3.	Additional environmental impact indicators	10
2.4.	Indicators describing the utilisation of resources	11
2.5.	Other environmental information describing different categories of waste	11
2.6.	Other environmental information describing output flows	12
2.7.	Information describing the biogenic carbon content at the plant gate	12
3.	REFERENCES	13

1. GENERAL INFORMATION

1.1. The DAPHabitat System

Programme operator:	Platform for Sustainable Construction Association www.clusterhabitat.pt geral@clusterhabitat.pt	 Cluster Habitat Sustentável
Address:	University of Aveiro Department of Civil Engineering 3810-193 Aveiro	
Email address:	deptechnico@clusterhabitat.pt	
Telephone number:	(+351) 234 401 576	
Website:	www.daphabitat.pt	
Logo:		



1.2. EPD Owner

Name of the owner:	SECIL - Companhia Geral de Cal e Cimento, S.A.
Address (production site):	Outão Plant 2901-864 Setúbal
Address (head office):	Estrada do Outão s/n, 2901-864 Setúbal
Telephone number:	(+351) 217 927 100
Email address:	apoio tecnico@secil.pt
Website:	https://www.secil.pt/
Logo:	
Information concerning the applicable management systems:	NP EN ISO 9001 - Quality Management System NP ISO 14001 - Environmental Management System NP ISO 45001 - Health and Safety Management System and Health EMAS Eco-Management Audit Scheme
Specific aspects regarding production:	CAE (economic activity code) 23510 - Manufacture of cement
Organization's environmental policy:	<p>Commitments made by SECIL as part of its Environmental Responsibility and Protection policy:</p> <ul style="list-style-type: none"> To ensure a responsible performance standard that makes using natural resources compatible with the maintenance and development of the ecosystems in which the company operates. To mitigate the impacts of its actions, through adopting the best technologies and best practices available and the appropriate training of its employees. To promote biodiversity in the territories under its management. To reduce the carbon impact of its activity, including by promoting the use of secondary raw materials and alternative fuels. <p>To provide the public with regular data on its environmental performance.</p>

1.3. Information concerning the EPD

Authors:	Paula Quinteiro Secil - Companhia Geral de Cal e Cimento, S.A.
Contact of the authors:	Address: University of Aveiro, Santiago Campus, 3810-193 Aveiro, Portugal Telephone: 234 370 200 E-mail: p.sofia@ua.pt Address: Estrada do Outão s/n, 2901-864 Setúbal, Portugal E-mail: info.pssg@secil.pt
Issue date:	15/11/2024
Registration date:	22/11/2024
Registration number:	EPD 016:2024
Valid until:	14/11/2029
Representativeness of the EPD (location, product, group of producers):	EPD of one (1) product class, produced in one (1) industrial unit, belonging to one (1) single producer (Secil - Companhia Geral de Cal e Cimento, S.A)
Where to find product information:	https://www.secil.pt/
Type of EPD	Cradle-to-gate EPD (A1-A3)

1.4. Verification Statement

Independent external verification in accordance with the NP ISO 14025:2010 and EN 15804:2012+A2:2019 standards	
Certification Body  (CERTIF – Associação para a Certificação)	Verifier(s)  Marisa Almeida José Dinis Silvestre

1.5. Registration of the EPD

Registration Programme Operator 
(Platform for Sustainable Construction)

1.6. PCR (product category rules) basic model


Name:	Base PCR model for construction products and services
Issue date:	Edition August 2023
Database registration number:	RCP-mb001
Version:	Version 2.3
Identification and contact details of the coordinator(s):	Marisa Almeida marisa@ctcv.pt Luís Arroja arroja@ua.pt José Dinis Silvestre jose.silvestre@ist.utl.pt
Identification and contact details of the authors:	Marisa Almeida marisa@ctcv.pt Luís Arroja arroja@ua.pt José Silvestre jds@civil.ist.utl.pt Fausto Freire Cristina Rocha Ana Paula Duarte Ana Cláudia Dias Helena Gervásio Victor Ferreira Ricardo Mateus António Baio Dias
Composition of the sector panel:	-
Consultation period:	18/11/2015 - 18/01/2016
Valid until:	01/06/2027

The CEN EN 15804 standard serves as the basic product category rules (PCR).

1.7. c-PCR (complementary product category rules)

Name:	EN 16908:2017+A1:2022 – Cement and building lime – Environmental product declarations – Product category rules complementary to EN 15804
Issue date:	March 2022
Database registration number:	EN 16908:2017+A1:2022
Version:	EN 16908:2017+A1, March 2022
Identification and contact details of the coordinator(s):	European Committee for Standardisation (CEN)
Identification and contact details of the authors:	-
Composition of the sector panel:	-
Consultation period:	-
Valid until:	-

1.8. Product information/product class

Identification of the product:	Portland Limestone Cement CEM II/A-L 42,5R																								
Illustration of the product:																									
Brief description of the product:	<p>CEM II/A-L 42.5R Portland limestone cement is a cement produced mainly from Portland clinker - with an average composition of 80%-94% clinker, 6%-20% limestone and 0%-5% other components. The clinker comes from Secil Outão.</p> <p>The cement does not contain any substance included on the Candidate List of Substances of Very High Concern (SVHC) above the limit for registration with the European Chemicals Agency, i.e. above 0.1 per cent (m/m).</p>																								
Main technical characteristics of the product:	<p>Table 1: Chemical, mechanical and physical characteristics of Portland limestone cement CEM II/A-L 42.5R.</p> <table border="1"> <thead> <tr> <th>Designation</th> <th>Units</th> <th>Cement Portland CEM I/A-LI 42.5R</th> <th>Standards</th> </tr> </thead> <tbody> <tr> <td>Sulphate content (in SO₃)</td> <td>%</td> <td>≤ 4.0</td> <td>NP EN 196-2</td> </tr> <tr> <td>Chloride Content</td> <td>%</td> <td>≤ 0.10</td> <td>NP EN 196-2</td> </tr> <tr> <td>Compressive strength</td> <td>MPa</td> <td>First days: 2 days: ≥ 30 Reference: 28 days, ≥ 42.5 and ≤ 62.5</td> <td>NP EN 196-1</td> </tr> <tr> <td>Start of setting</td> <td>min</td> <td>≤ 60</td> <td>NP EN 196-3</td> </tr> <tr> <td>Expandability</td> <td>min</td> <td>≤ 10.0</td> <td>NP EN 196-3</td> </tr> </tbody> </table>	Designation	Units	Cement Portland CEM I/A-LI 42.5R	Standards	Sulphate content (in SO ₃)	%	≤ 4.0	NP EN 196-2	Chloride Content	%	≤ 0.10	NP EN 196-2	Compressive strength	MPa	First days: 2 days: ≥ 30 Reference: 28 days, ≥ 42.5 and ≤ 62.5	NP EN 196-1	Start of setting	min	≤ 60	NP EN 196-3	Expandability	min	≤ 10.0	NP EN 196-3
Designation	Units	Cement Portland CEM I/A-LI 42.5R	Standards																						
Sulphate content (in SO ₃)	%	≤ 4.0	NP EN 196-2																						
Chloride Content	%	≤ 0.10	NP EN 196-2																						
Compressive strength	MPa	First days: 2 days: ≥ 30 Reference: 28 days, ≥ 42.5 and ≤ 62.5	NP EN 196-1																						
Start of setting	min	≤ 60	NP EN 196-3																						
Expandability	min	≤ 10.0	NP EN 196-3																						
Description of the application/use of the product:	<p>CEM II/A-L 42.5R Portland Limestone Cement is a highly versatile product, combining good workability and high strengths, characteristics that enable it to be used in concrete of different strength classes and lightweight or heavyweight prefabrication.</p> <p>CEM II/A-L 42.5R Portland cement is a product especially formulated and suited to:</p> <ul style="list-style-type: none"> ▪ ready-mixed or site-made concrete of medium to high strength; ▪ prestressed concrete at current ages; ▪ sprayed concrete, lightweight concrete and regularisation concrete; ▪ heavyweight standard turnover prefabrication or lightweight high turnover prefabrication; ▪ reinforcement and repair of structural concrete. 																								
Placing on the market/Rules for application on the market/Technical product standards:	CNP EN 197-1:2012 composition, specifications and conformity criteria for ordinary cements Conformity Certification																								
Quality control:	Not applicable																								
Special delivery conditions:	Not applicable																								
Components and substances to declare:	Not applicable																								
Information where explanatory documents can be obtained:	CEM II/A-L 42.5R Portland limestone cement is available for sale to the general public. For detailed information about the product, please contact SECIL by e-mail info.pssg@secil.pt																								
History of LCA studies:	--																								

1.9. LCA calculation rules

Functional unit:	Not applicable
Declared unit:	1 000 kg of CEM II/A-L 42.5R Portland limestone cement
System boundaries:	The system evaluated includes the A1-A3 module (product stage). A more detailed description of the system boundary is given in Section 2.1.
Criteria for the exclusion:	<p>The LCA considered the extraction and processing of natural raw materials, the production of auxiliary materials and the energy consumed in the manufacture of CEM II/A-L 42.5R Portland limestone cement. As the Portland clinker produced at Secil is the main raw material, the extraction and processing of natural raw materials and the transport of secondary raw materials (waste from other industries) were also considered. The waste management processes generated in clinker production (until the end of waste status is reached) for which inventory data is available were considered.</p> <p>CEM II/A-L 42.5R Portland limestone cement also excluded grinding bodies, bag filters, lubricating oils and the production of acetylene used in maintenance operations (welding). In clinker, bag filters, the refractory lining of the kiln, lubricating oils, the production of acetylene used in maintenance operations (welding), sodium hypochlorite, sodium hydroxide, chlorine and the biocide used for water treatment were excluded from the system boundary, as they correspond to a mass of less than 1% of the total mass of inputs. The total mass of input from the unit processes does not exceed 5% of the total mass of inputs and is therefore covered by the exclusion criterion defined in document EN 16908:2017+A1 - Cement and building lime - Environmental product declarations - Product category rules, namely its mass is less than 1% of the total mass of inputs.</p> <p>In the LCA for Portland cement, it should be noted that the energy and water consumption of the administrative areas, as well as the production of wastewater and waste from these areas, were not included. In addition, environmental loads associated with the construction and maintenance of infrastructure and equipment (capital goods) were excluded.</p>
Assumptions and limitations:	The results of the environmental impacts and other indicators presented in this EPD refer to the year 2022.
Quality and other characteristics of the information used in the LCA:	<p>The quality of the inventory data was assessed taking into account the criteria of the PEF (Product Environmental Footprint) category rules (section 5.6 of the guide, Menfredi et al., 2012), as indicated in table E.2 (Data quality and criteria from the Product Environmental Footprint Category Rules) of EN 15804:2012+A2:2019+AC and in the guide to the software used, the GCCA EPD Tool for Cement and Concrete (V 4.2), and based on the recommendations of the PCR documents - Base Model. The quality of the data was broadly classified between reasonable and good on a 5-level qualitative scale from very bad to very good, in line with the data quality requirements - temporal, geographical and technological. The information on the production of CEM II/A-L 42.5R Portland cement is less than 5 years old, using mostly primary data collected directly from SECIL - Outão Plant. Real and specific data from the production unit was used for the operations associated with the process of manufacturing CEM II/A-L 42.5R Portland cement. The information for background processes not provided by SECIL, and over which SECIL has no influence, was obtained from generic data in the Ecoinvent database v3.5. These were selected to provide geographical and technological coverage that fulfils the data quality criteria stipulated in Annex E of EN 15804:2012+A2:2019. Electricity production was modelled in the GCCA with information on the mix of sources of energy from the International Energy Agency (IEA).</p>
Allocation rules:	To determine the inputs and outputs associated only with the production of CEM II/B-M (V-L) 42.5R Portland cement, the procedure for subdividing the unit process was first adopted, following the recommendations of the PCR document - Base Model. Thus, only the operations associated with the production of the product being analysed were considered, and operations exclusive to other products were excluded. Then, an allocation procedure was applied for the operations included based on the mass of the different products produced.
Software used for the assessment:	GCCA EPD Tool for Cement and Concrete (V 4.2), International version.
Background database used for the LCA:	Ecoinvent database version 3.5 published in December 2018; cut-off approach.
Variability of the results of LCIA	The main factor affecting the variability of LCIA results will be the clinker content used in the production of Portland limestone CEM II/A-L 42.5R cement, which can vary from 73.5% to 84.0%, with the average clinker consumption being 79%. This variability in cement composition resulted in a variability of less than 5 per cent in the LCIA results.
Comparability of EPD products´ :	EPD for construction products and services may not be comparable if they are not produced under EN 15804 and EN 15942 and the comparability conditions determined by ISO 14025.

1.10. Use of average environmental performance

Not applicable

1.11. Technical information for Reference Service Life (RSL)

Not applicable

1.12. Diagram of process input and output flows

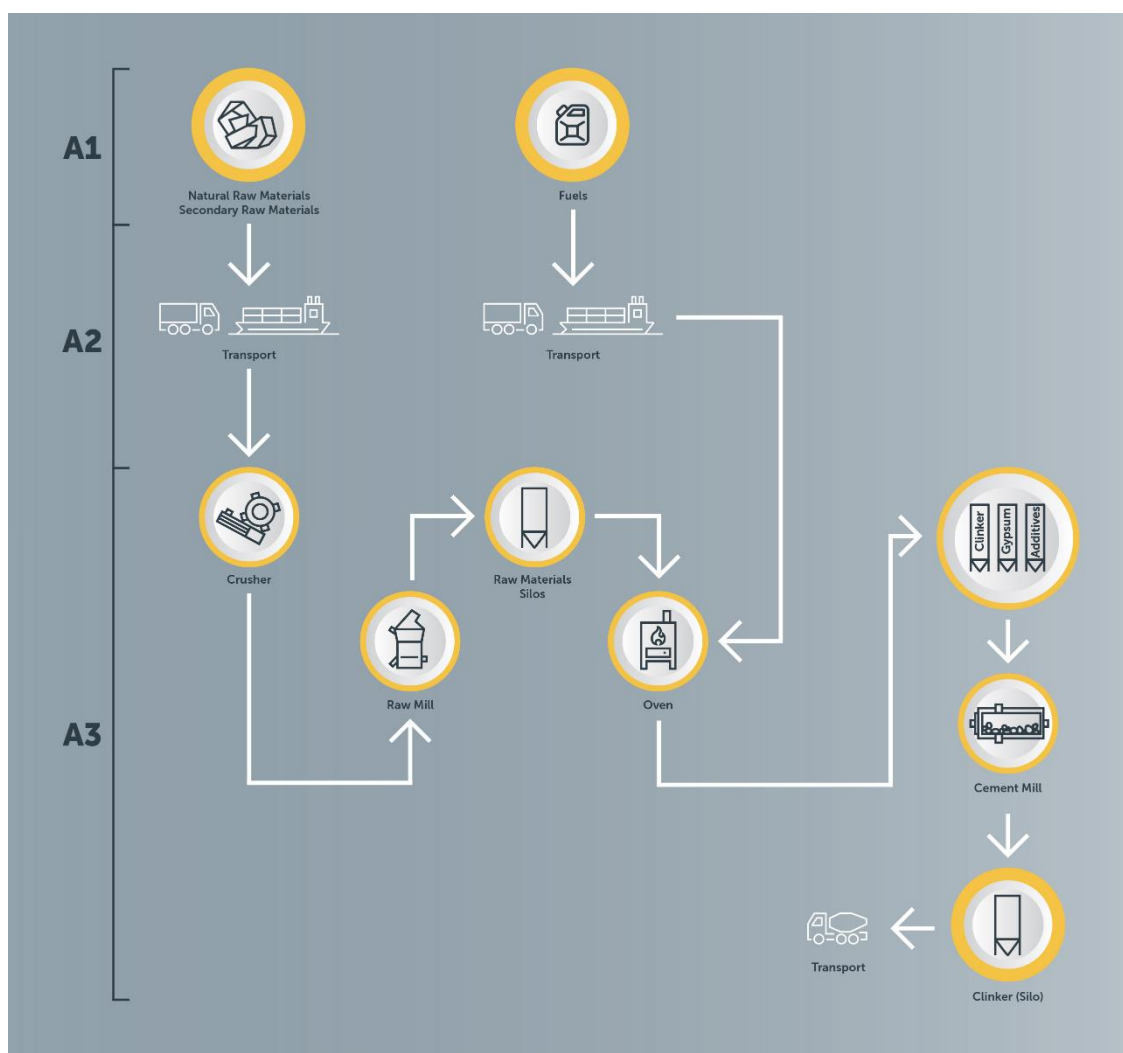


Figure 1: Flowchart of the Portland cement manufacturing process

2. CORE ENVIRONMENTAL IMPACT INDICATORS

2.1. Description of the system boundaries

(✓= included; ND = module not declared)

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				ENVIRONMENTAL BENEFITS AND BURDENS BEYOND THE SYSTEM BOUNDARY
Raw materials	Transport	Manufacturing	Transport	Construction and installation process	Use	Maintenance	Repairing	Replacement	Restoration	Operational energy use	Operational water use	Deconstruction and demolition	Transport	Waste processing	Disposal	Reuse, recovery, potential recycling
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
✓	✓	✓	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

The A1-A3 module (product stage) for CEM II/A-L 42.5R Portland limestone cement considers the extraction and processing of primary (natural) raw materials, the production of auxiliary materials, the transport of raw materials, fuels and electricity to the production unit, Secil Outão.

The production of CEM II/A-L 42.5R Portland limestone cement requires Portland clinker, gypsum and ground limestone as the main raw materials. The clinker is produced at Secil Outão. The limestone comes from the Outão quarry. Mining is carried out above ground, on plateaus, starting at the highest level. In line with good environmental practice, the quarry's paths are watered to minimise the effect of dust during the exploration phase and the landscape recovery of the floors that have already been explored is guaranteed, by the approved Environmental and Landscape Recovery Plan. The plaster comes from external production.

The main raw materials used to produce Secil Portland clinker are marl or clay and limestone. Once the materials are extracted from the quarry, they are in the form of blocks measuring up to 1m³, so it is necessary to reduce their size to a dimension compatible with the transportation, storage and supply of the subsequent manufacturing phases; this operation is performed in the crusher. After crushing, the natural raw materials are transported by conveyor belt for storage. The limestone is stored in vertical silos, while the marl and secondary raw materials are stored in a horizontal, circular hangar that allows for the pre-homogenisation of these materials.

This is followed by raw milling, in which the natural and secondary raw materials (materials derived from waste, e.g. concrete sludge, calcination waste, lime sludge, kiln linings, construction and demolition waste) are subjected to a drying, milling and homogenising process. Once the proportion of raw materials has been defined, they are transported to mills where the "flour" or "raw" material is produced, i.e. a finely ground mixture, in well-defined proportions, of all the natural and secondary raw materials. The mill works by injecting water to stabilise the grinding track layer. The water will mix with the raw materials creating a layer height necessary for the grinding process to be efficient. The hot gases coming from the kiln will feed the mill, which will cause some of the water to evaporate, making it necessary to replace it (make-up). This make-up therefore corresponds to actual water consumption. This water comes from the company boreholes and requires treatment with sodium hypochlorite, sodium chloride, bio-dispersant, chlorine and disinfectant to eliminate bacteria and prevent calcification in the equipment, respectively. During milling, the "raw" material is also dried, using the heat contained in the exhaust gases from the rotary kilns.

This is followed by the preheating stage in which the raw material is extracted from the storage silos and fed into the preheating system (cyclone tower), where it is heated by the exhaust gases resulting from the burning of the fuels in the rotary kiln. The raw material then goes into the kiln and moves along it by rotation and a slight inclination, with heating continuing and the physio-

chemical reaction process of clinkerisation at a temperature of up to 1450°C to ultimately produce clinker. As firing is an energy-intensive stage, primary fuels are used, i.e. fossil fuels, as well as secondary fuels (fuels derived from waste, e.g. used tyres, fluff and refuse-derived fuel RDF).

From 1450°C onwards, the clinker begins to cool, still inside the kiln, and is completed in the cooler, where counter-current air is introduced, using this heated air as secondary and tertiary firing air. This air is generated by the cooler's fans and is therefore divided into secondary air, which goes into the kiln, and tertiary air, which is the air needed for combustion in the calciner. In this way, there is a partial recovery of the clinker's thermal content to reduce energy consumption in the kilns. Particle matter emissions are controlled by dedusting systems and gas emissions into the air by automated control systems for driving the kilns. The clinker is stored and then used to produce CEM II A/L 42.5R Portland cement. The transport of clinker to the mills is carried out with bag filters to minimise diffuse dust emissions. The cement is produced in horizontal tubular mills. Clinker, gypsum (cement setting regulator), limestone and grinding aids, in well-defined proportions, according to the quality plan, to obtain CEM II A/L 42.5R Portland cement, which is stored in silos. The cement is ground in a closed-circuit using 3rd generation separators. Also, to minimise diffuse dust emissions, the cement mill has bag filters. Spot monitoring of total suspended particulate emissions is carried out.

CEM II/A-L 42.5R Portland limestone cement is sold in bulk.

During clinker production, the diesel used for internal movements at the Secil plant and quarry comes from diesel refuelling stations at the plant and quarry. Therefore, pollutant emissions to rainwater from hydrocarbon separators associated with the diesel refuelling station and the collection of oily water throughout the plant and in the quarry, associated with the workshop and diesel refuelling station, were considered. The diesel consumption of emergency generators was also considered to guarantee the normal operation of clinker production processes in the event of a temporary power cut. The transport and treatment of waste resulting from the clinker production process, such as waste containing hydrocarbons, was considered.

During Portland cement production, the diesel used for internal movements at the Secil plant and quarry comes from diesel refuelling stations at the plant and quarry. Pollutant emissions to rainwater from the hydrocarbon separators associated with the diesel refuelling station and the collection of oily water throughout the plant and on the wharf were therefore considered.

The production of CEM II A/L 42.5R Portland limestone cement and its subsequent sale in bulk does not result in the generation of waste.

2.1.1. Justification for exemption to declare modules of C1, C2, C3, C4 and D


CEM II/A-L 42.5R Portland limestone cement, being an intermediate product, fulfils all the conditions required by EN 15804:2012+A2:2019+AC and EN 16908:2017+A1, to consider the cradle-to-gate life cycle (A1-A3), namely:

- Cement is a raw material with a wide range of potential applications, and it is not possible a priori to establish a single reference service life;
- cement is physically integrated with other products, such as aggregates, into downstream products, such as concrete, mortar, etc., so it is not possible to physically separate it at the end of its life;
- the cement is not identifiable at the end of its life as the result of a physical or chemical transformation process
- cement does not contain biogenic carbon and is exempt from the obligation to declare modules C1-C4 and D.

2.2. Basic environmental impact indicators

	Global warming potential - total; GWP-total	Global warming potential - fossil fuels; GWP-fossil	Global warming potential - biogenic; GWP-biogenic	Global warming potential - Land use and land use change; GWP-luluc	Depletion potential of the stratospheric ozone-layer; ODP	Acidification potential; AP
Unit	kg CO ₂ eq.	kg CO ₂ eq.	kg CO ₂ eq.	kg CO ₂ eq.	kg CFC 11 eq.	mol H ⁺ eq.
Module A1-A3	6.81E+02	6.80E+02	1.90E-02	6.89E-02	1.39E-05	1.14E+00

LEGEND:

 Product Stage

Units expressed per declared unit (1000 kg CEM II/A-L 42.5R Portland limestone cement).

	Eutrophication potential of aquatic freshwater; EP-freshwater	Eutrophication potential of aquatic marine; EP-marine	Terrestrial eutrophication potential; EP-terrestrial	Formation potential tropospheric ozone formation; POCP	Abiotic depletion potential for non-fossil resources; ADP-minerals & metals	Abiotic depletion potential for fossil resources; ADP-fossil	Water (user) deprivation potential; WDP
Unit	kg P eq.	kg N eq.	mol N eq.	kg CO ₂ eq.	kg Sb eq.	MJ, P.C.I	m ³ eq. of water globally unavailable
Module A1-A3	7.72E-03	8.17E-04	4.19E+00	1.13E+00	1.31E-04	2.74E+03	2.68E+01

LEGEND:

 Product Stage


Units expressed per declared unit (1000 kg CEM II/A-L 42.5R Portland limestone cement).

The results obtained for the indicators “Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)”, “Abiotic depletion potential for fossil resources potential (ADP-fossil)” and “Water (user) deprivation potential (WDP)” should be used with caution since the uncertainties associated with them are high or there is little experience with the indicator.

2.3. Additional environmental impact indicators

	Potential incidence of disease due to emissions of fine particulate matter PM	Potential human exposure efficiency in relation to U235 IRP	Potential Comparative Toxic Unit for ecosystems ETP-fw	Potential Comparative Human Toxicity Unit, carcinogenic HTP-c	Potential Comparative Human Toxicity Unit, non-carcinogenic HTP-nc	Potential soil quality index SQP
Unit	Incidence of disease	kBq U 235 eq.	CTUe	CTUh	CTUh	-
Module A1-A3	1.43E-05	4.09E+00	5.16E+01	1.03E-06	1.44E-05	1.69E+03

LEGEND:


 Product Stage

Units expressed per declared unit (1000 kg CEM II/A-L 42.5R Portland limestone cement).

The impact indicator "potential human exposure efficiency relative to U235" focuses mainly on the possible impact of a low dose of ionising radiation on human health resulting from the nuclear fuel cycle. It does not consider effects arising from possible nuclear accidents, occupational exposure or the disposal of radioactive waste in underground facilities. Potential ionising radiation from soil, radon and some building materials is also not measured by this indicator. The results of the indicators "potential comparative toxic unit for ecosystems (ETP-fw)", "potential comparative toxic unit for humans, cancer effects", "potential comparative toxic unit for humans, not cancer effects" and "potential soil quality index" should be used with caution as the uncertainties associated with them are high or there is little experience with the indicator.

2.4. Indicators describing the utilisation of resources


	Primary energy					
	EPR	RR	TRR	EPNR	RNR	TRNR
Unit	MJ, P.C.I	MJ, P.C.I	MJ, P.C.I	MJ, P.C.I	MJ, P.C.I	MJ, P.C.I
Module A1-A3	1.23+03	0.00E+00	1.23E+03	2.74E+03	0.00E+00	2.74E+03

LEGEND:
 Product Stage

Units expressed per declared unit (1000 kg CEM II/A-L 42.5R Portland limestone cement).

EPR = use of renewable primary energy excluding renewable primary energy resources used as raw materials; RR = use of renewable primary energy resources used as raw materials; TRR = total use of renewable primary energy resources (EPR + RR); EPNR = use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; RNR = use of non-renewable primary energy resources used as raw materials; TRNR = total use of non-renewable primary energy resources (EPNR + RNR).

	Secondary material and fuel, and water use			
	SM	RSF	NRSF	Net value of fresh water
Unit	kg	MJ, P.C.I	MJ, P.C.I	m ³
Module A1-A3	6.38E+01	2.45E+02	6.57E+02	6.69E-01


LEGEND:
 Product Stage

Units expressed per declared unit (1000 kg CEM II/A-L 42.5R Portland limestone cement).

SM = use of secondary material; RSF= use of renewable secondary fuels; NRSF = use of non-renewable secondary fuels; Fresh water = use of the net value of fresh water.

2.5. Other environmental information describing different categories of waste

	Hazardous waste disposed	Non-hazardous waste disposed	Radioactive waste disposed
Unit	kg	kg	kg
Module A1-A3	1.63E-01	1.10E-03	0.00+00

LEGEND:
 Product Stage

Units expressed per declared unit (1000 kg CEM II/A-L 42.5R Portland limestone cement).

The characteristics that make waste hazardous are described in the applicable legislation in force, for example in the European Waste Framework Directive.

2.6. Other environmental information describing output flows

	Components for reuse	Materials for recycling	Materials for energy recovery	Exported energy
Unit	kg	kg	kg	MJ
Module A1-A3	0.00E+00	1.59E+00	7.11E+00	0.00E+00

LEGEND:

 Product Stage

Units expressed per declared unit (1000 kg CEM II/A-L 42.5R Portland limestone cement).

The characteristics that make waste hazardous are described in the applicable legislation in force, for example in the European Waste Framework Directive.

2.7. Information describing the biogenic carbon content at the plant gate

Biogenic carbon content*	Units**	Module A1-A3 (results)
Biogenic carbon content in the product	Kg C	Not applicable
Biogenic carbon content in the packaging	Kg C	Not applicable

* 1 kg of biogenic carbon is equivalent to 44/12 kg of CO₂

** This information can be omitted whenever the content of biogenic carbon in the product, or in the respective packaging, is less than 5% of the mass of the product, or the respective packaging.

3. REFERENCES

- ✓ GCCA (2023). GCCA Industry EPD Tool for cement and concrete (V4.0). Global Cement and Concrete Association (GCCA) Quantis, Switzerland;
- ✓ **DAPHabitat System General Instructions**, Version 2.1, August 2023 (at www.daphabitat.pt);
- ✓ **PCR - Base Model. Construction products and services. In accordance with EN 15804:2012+A2:2019. DAPHabitat System**. Version 2.3, August 2023 (at www.daphabitat.pt);
- ✓ **NP ISO 14025:2009** Environmental labelling and declarations - Type III environmental declarations - Principles and procedures;
- ✓ **EN 15804:2012+A2:2019+AC** Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products;
- ✓ **EN 16908:2017+A1** - Cement and building lime - Environmental product declarations - Product category rules complementary to EN 15804 European Committee for Standardisation;
- ✓ **EN 15942:2021** Sustainability of construction works – Environmental product declarations – Communication format business-to-business;
- ✓ IEA (2024). Portugal - Countries & Regions. International Energy Agency (IEA). <https://www.iea.org/countries/portugal/electricity>, accessed June 2024.
- ✓ Manfredi S., Allacker K., Chomkham Sri K., Pelletier N., Maia de Souza D. (2012). Product Environmental Footprint (PEF) Guide. European Commission (EC), Joint Research Centre (JRC), Ispra, Italy;
- ✓ Secil (2023). Secil CO₂ Manual. Monitoring, calculating and reporting CO₂ emissions. Period 2021-2025. Version 06.